

F33PT

INDUSTRIAL FRAMING NAILER


50mm-90mm, 33° Angle



Features and Benefits:

- Accepts both Paper or Wire collated 33° framing nails
- 1,050 inch/lbs driving power. The industry's most powerful framer!
- Fastener length 50mm-90mm
- Converts to an MCN Nailer with included tip
- Lightweight Magnesium body - weighs just 3.6kgs
- Patented Push-Button Depth of Drive adjustment


33° collated stick nails

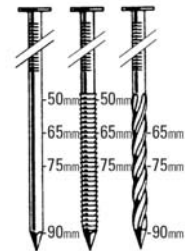

SMOOTH RING SCREW



Accepts both
Paper & Wire collated
SENCO® or PASLODE®
angle framing nails

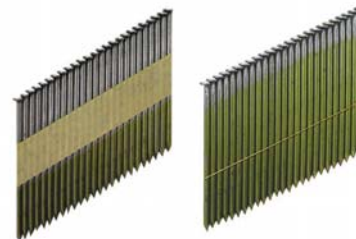

Paper Collated Stick Wire Weld Stick

Specifications:

Driving Power: 1,050 inch/lbs
Fastener Length: 50mm to 90mm
Fastener Diameter: 2.87mm to 3.33mm
Magazine Capacity: 85 nails
Operating Pressure: 70 to 120 PSI
Power-to-Weight Ratio: 133
Tool Weight: 3.6kg
O-Ring Kit: N89-ORK



Framing ■

BOSTITCH

F28WW

INDUSTRIAL FRAMING NAILER


50mm-90mm, 28° Angle




Features and Benefits:

- Accepts both Paper or Wire collated 28° framing nails
- 1,050 inch/lbs driving power. The industry's most powerful framer!
- Fastener length 50mm-90mm
- Lightweight Magnesium body - weighs just 3.5kgs
- Patented Push-Button Depth of Drive adjustment

28° collated stick nails

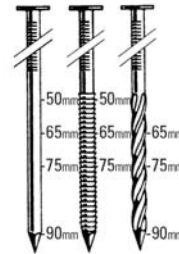

SMOOTH RING SCREW



Paper Collated Stick



Wire Weld Stick

Specifications:

- Driving Power: 1,050 inch/lbs
- Fastener Length: 50mm to 90mm
- Fastener Diameter: 2.87mm to 3.33mm
- Magazine Capacity: 100 nails
- Operating Pressure: 70 to 120 PSI
- Power-to-Weight Ratio: 138
- Tool Weight: 3.5kg
- O-Ring Kit: N89-ORK



N100S

HIGH-POWER FRAMING NAILER


50mm-100mm, 28° Angle




Features and Benefits:

- Accepts both Paper or Wire collated 28° framing nails
- Aluminium housing for jobsite durability
- Extruded aluminium magazine survives falls
- High Power engine drives nails up to 100mm (4")

28° collated stick nails

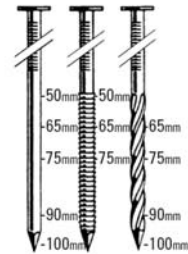

SMOOTH RING SCREW

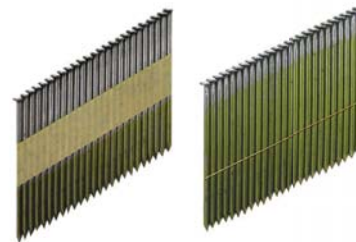

Paper Collated Stick

Wire Weld Stick

Specifications:

Driving Power: 1,350 inch/lbs
Fastener Length: 50mm to 100mm
Power-to-Weight Ratio: 133
Operating Pressure: 70 to 120 PSI

Applications:

- Wharfs, docks and boardwalks
- Heavy duty pallets & crates
- Exterior decks and landscaping



Framing ■

BOSTITCH
STANLEY